

Compressed Air Dryers

## High Temperature Refrigerated Dryer



### Dryer, Filter, and Drain in One Compact Package

Kaeser High Temperature Refrigerated Dryers (HTRD) are specifically designed for use with 5-25 hp piston compressors, although they will work well with any similar sized compressor producing high discharge temperatures. The HTRD contains an aftercooler, refrigeration unit, filtered separator and drain to remove moisture and contaminants to a level suitable for most shop tools. This greatly increases tool life, reducing maintenance and downtime. For paint spraying applications we strongly recommend also using a KOR model coalescing filter.

### Easy to Install

The HTRD dryer features a compact design that requires little floor space and allows for convenient installation. Staggered inlet/outlet connections make piping easy. Simply make pipe connections and plug in the electrical cord to a 120 V or 230 V depending on model, 1 phase outlet and the unit is ready for operation.

### Easy to Use and Maintain

The dryer operates continuously without adjustments. Replacing the filter sleeve is simple and cleaning the refrigeration condenser filter and inlet strainer is easy to accomplish.

### Standard Features:

- Built to handle high inlet temperatures to 180°F
- Stainless steel, plate-type heat exchangers are compact, durable, and efficient
- Integral filter helps remove moisture, hydrocarbons and solid particles
- Condensate drain automatically discharges liquid from dryer without air loss
- Automatic refrigeration temperature control system maintains precise chilled air temperature
- Hermetic refrigeration compressor requires no maintenance or adjustments
- Cool air exiting from the evaporator is reheated to save energy and prevent pipe sweating

*All dryers are CSA certified, CFC free, and use environmentally friendly R407c refrigerant.*

*Five-year warranty on heat exchanger.*


*Two-year warranty on refrigeration system.*

## Specifications

Model	Flow Rate* @ 175 psig (scfm)	Flow Rate* @ 150 psig (scfm)	Flow Rate* @ 125 psig (scfm)	Flow Rate* @ 100 psig (scfm)	Connection Size (in.)	Dimensions W x D x H (in.)	Weight (lb.)
HTRD 20	23	22	20	18	1/2	10 <sup>1</sup> / <sub>8</sub> x 12 <sup>7</sup> / <sub>8</sub> x 28 <sup>1</sup> / <sub>4</sub>	79
HTRD 25	29	27	25	23			80
HTRD 35	41	38	35	32			81
HTRD 50	58	54	50	45	3/4	16 <sup>7</sup> / <sub>8</sub> x 16 <sup>7</sup> / <sub>8</sub> x 36 <sup>3</sup> / <sub>4</sub>	150
HTRD 75	87	81	70	68			155
HTRD 100	116	108	100	91	1	16 <sup>7</sup> / <sub>8</sub> x 16 <sup>7</sup> / <sub>8</sub> x 45 <sup>3</sup> / <sub>4</sub>	187
HTRD 125	145	135	125	114			189

(\* ) Capacities based on 180°F inlet temperature, 160°F inlet pressure dew point, 95°F ambient temperature, 50°F outlet pressure dew point, and less than 5 psi pressure drop. Models 20-75 are 115V/1ph/60Hz. Models 100-125 are 230V/1ph/60Hz.

**Notes:** Maximum Working Pressure: 250 psig  
Ambient Temperature Range: 40-110°F  
Maximum Inlet Temperature: 180°F

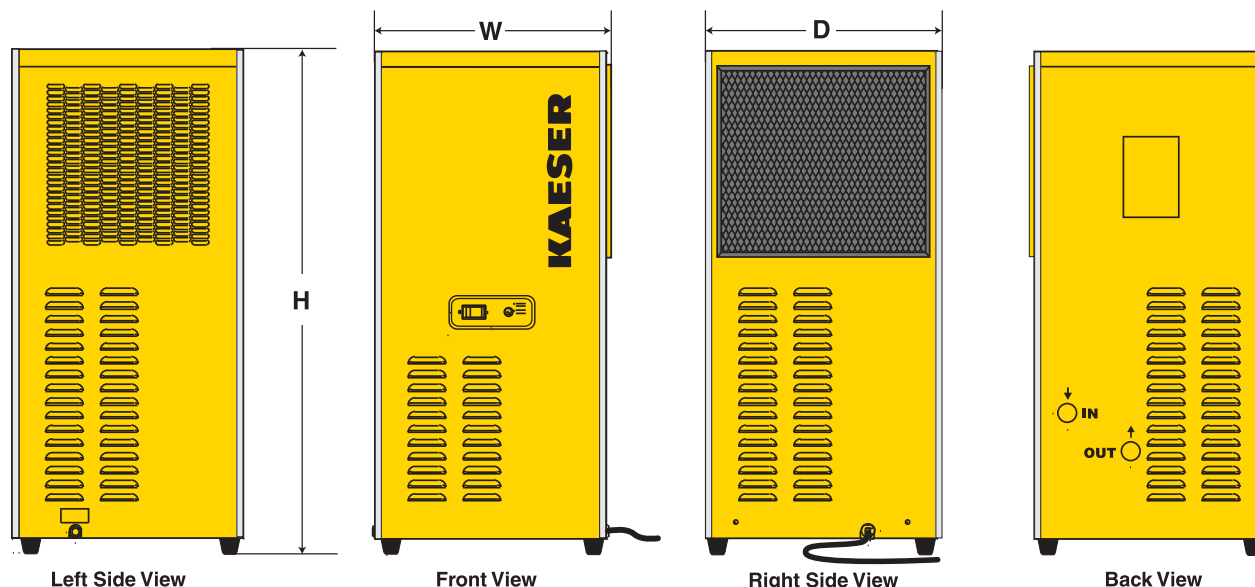

Specifications are subject to change without notice.

# KAESER COMPRESSORS

**Built for a lifetime.™**

Corporate Headquarters:

P.O. Box 946  
Fredericksburg, Virginia 22404  
Phone 540-898-5500  
Fax 540-898-5520  
www.kaeser.com

Certified Management Systems



## The Air Systems Specialist

With over 85 years of experience, Kaeser is the air systems specialist. Our extensive 100,000 square foot facility allows us to provide unequalled product availability. With service centers nationwide and our 24-hour emergency parts guarantee, Kaeser customers can rely on the best after-sales support in the industry. Kaeser stands committed on providing the highest quality air system for your specific compressed air needs.